


Gloss Cold Seal Release Film

PCT-1 (CV) CSR

Structure

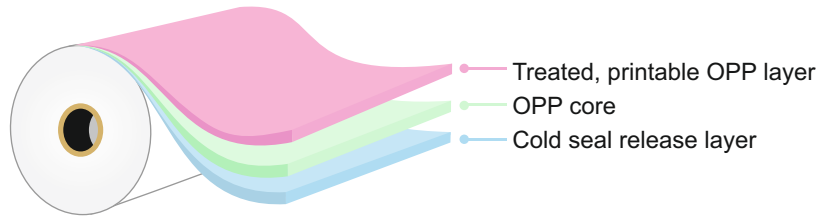

Description

One side treated BOPP film other side with cold seal release properties.

Features

- Excellent printability at high speed
- Good ink adhesion
- Good antistatic
- Formulated for cold seal coating applications

Applications

- For temperature sensitive products like chocolates & ice cream
- For cold seal release applications

Provisional Data Sheet

Properties	Ref.	Units	ASTM#/Test Method	PCT-1 (CV) CSR		
Physical Data						
Average Thickness		micron	D-374-C	12	15	18
		gauge		48	60	72
		mils		0.47	0.59	0.7
Thickness Variation		% (±)		3		
Density		g/cc		0.905		
Average Substance		g/m ²		10.9	13.6	16.3
Surface tension (min.)		dynes/cm	D-2578	38		
Kinetic COF	UT-UT		D-1894	0.20 – 0.30		
Yield		m ² /Kg	D-4321	91.74	73.52	61.3
		in ² /lb		64499	51689	43098
Optical Data						
Gloss (45°)		gardner	D-2457	> 93		
Haze		%	D-1003	1.0 – 2.0		
Mechanical Data						
Tensile Strength	MD	kg/ cm ²	D-882	1200 - 1500		
	TD			2500 - 3000		
Elongation	MD	%	D-882	130 - 180		
	TD			30 - 80		
Thermal Data						
Shrinkage (120°C, 5 min.)	MD	%	D-1204	2.0 - 4.0		
	TD			1.0 - 3.0		

CTM : Cosmo Test Method MD : Machine Direction TD : Transverse Direction HR : Heat Resistance UT = Un-treated

Disclaimer : The information provided above is based on COSMO FILMS LTD's conclusive tests, which are indicative only and provided as guidelines. They do not constitute a guarantee of any specific product attributes or the suitability of products for specific applications.

Updated as on Jan - 2024